



פנס חץ

תיאור: תאורת כבישים ורחובות

מקט: PY-LED591

צבע: אפור גרפיט

חומר: יציקת אלומיניום, כיסוי זכוכית מחוסמת

סוג נורה: LED

הספקים: 40W-180W

מותאם להתקנה: ראש עמוד/צד מתכוונן 2"


מותאם לגובה: 4-15 מטר

נתונים טכניים

40-180w	הספקים
3000K/4000K	גוון האור
140 lm/W	יעילות אורית
>70	CRI
100,000H	אורך חיים
IP66	דרגת אטימות
IK09	דרגת הגנה מפני פגיעות מכניות
-35°C ~ 45°C	טמפרטורת עבודה
Lumileds	יצרן הLED
Philips/inventr	דרייבר
אפשרות ל Pwm, dali, nema	תקשורת
220-240V, 50/60Hz	מתח עבודה

 IK09		 CB	 CE	 IP66	 מתי מכון התקנים הישראלי	 LM 79	 LM 80	 TM 21
--	---	--	--	--	---	--	--	--

מידות

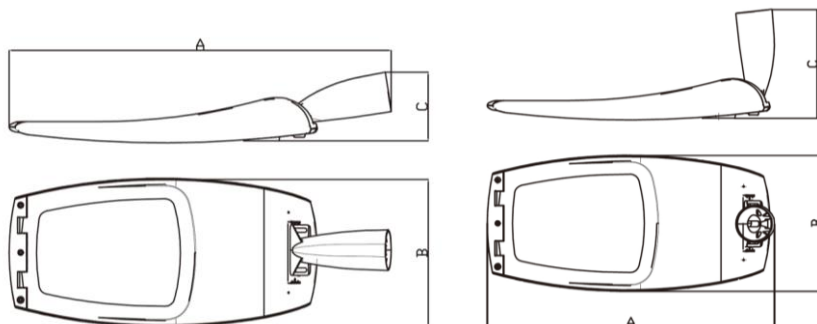

הספק	גודל	A	B	C
עד 60 W	S	641	241	114
עד 110 W	M	738	289	116
עד 180 W	L	922	360	144


הספק	גודל	A	B	C
עד 60 W	S	510	241	238
עד 110 W	M	610	289	235
עד 180 W	L	775	360	293

אפשרויות פוטומטריות


● Luminous Intensity Distribution Diagram

The Elux series LED street light luminaire come with a robust optic compartment design, enable many different options of LED chipset and optic lens modules, which will help customers to always cope with the latest development of efficiency of led by using different type of led package, from 3030, 3535 to 5050.

Option 1: with 3535 LED package, basically the Elux could offer 6 standard light distribution curves as following

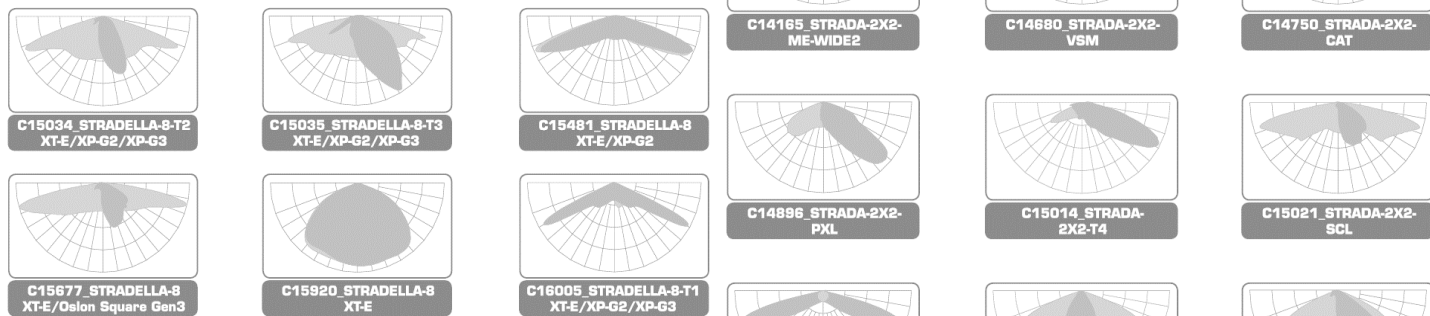

Option 2: with 5050 LED package, basically the Elux could offer 18 standard light distribution curves as following

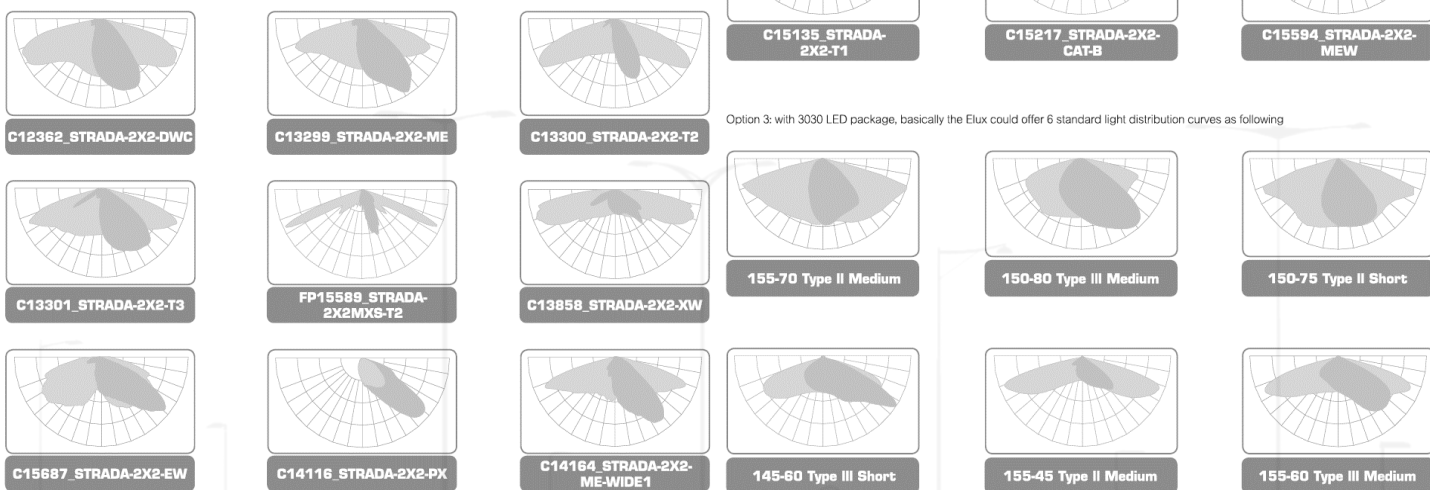

Option 3: with 3030 LED package, basically the Elux could offer 6 standard light distribution curves as following

