




פנס כדור לד פרזמטי

תיאור: תאורה דקורטיבית אורבנית
מקט: PY-GD119
צבע: אפור גרפיט/לפי צבע RAL
חומר: יציקת אלומיניום בצביעה אלקטרוסטטית,
 כיסוי פוליקרבונט
סוג נורה: LED
הספקים: 30W-50W
מותאם להתקנה: בראש עמוד 2.5-2"
מותאם לגובה: 3-5 מטר

נתונים טכניים

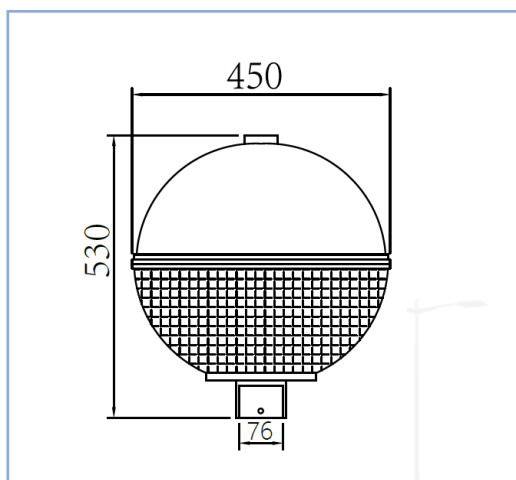

30-50w	הספקים
3000K / 4000K	גוון האור
120 lm/W	יעילות אורית
>70	CRI
IP66	דרגת אטימות
IK08	דרגת הגנה מפני פגיעות מכניות
50°C עד -35°C	טמפרטורת עבודה
lumileds	יצרן הLED
PHILLIPS	דרייבר
10KV	הגנה מנחשולי מתח
220-240V , 50/60Hz	מתח עבודה












אפשרויות פוטומטריות














● Luminous Intensity Distribution Diagram

The Elux series LED street light luminaire come with a robust optic compartment design, enable many different options of LED chipset and optic lens modules, which will help customers to always cope with the latest development of efficiency of led by using different type of led package, from 3030, 3535 to 5050.

Option 1: with 3535 LED package, basically the Elux could offer 6 standard light distribution curves as following



Option 2: with 5050 LED package, basically the Elux could offer 18 standard light distribution curves as following



Option 3: with 3030 LED package, basically the Elux could offer 6 standard light distribution curves as following